



VARIABLE AREA & PADDLE WHEEL FLOW METERS

ABOUT AW-LAKE VARIABLE AREA METERS:

AW-Lake's line of variable area and paddle wheel flow meters have been used in industrial applications around the world. This includes lubrication and cooling systems, as well as pneumatic and hydraulic systems, process control systems, and even gas and chemical applications.

State-of-the-Art Production

Variable Area flow meters from Lake Monitors have recently undergone a production re-design. Utilizing automated calibration software and a high-resolution system, our new proprietary calibration and scaling process records the unique flow profile of each meter during calibration. The integrated laser engraving system marks precise scale increments for a more accurate, custom-scaled meter.

Excellent Customer Service


AW-Lake products are built to order in our Oak Creek facility, and typically ship within 5 days from order placement. We also offer expedited service with 24-hour turn-around. We understand our customers often face tight installation deadlines so we do everything we can to take care of your needs. From fast turnaround to technical support, we have your back.

Meet or Beat Competitor Pricing

AW-Lake prides itself on remaining competitively priced, and will do what is necessary to make sure our customers get the very best price in the market. When we realize cost savings, we pass it along to you!

Global Support

With offices in the US, Europe, China and Singapore, we are strategically positioned to support our customers around the globe.

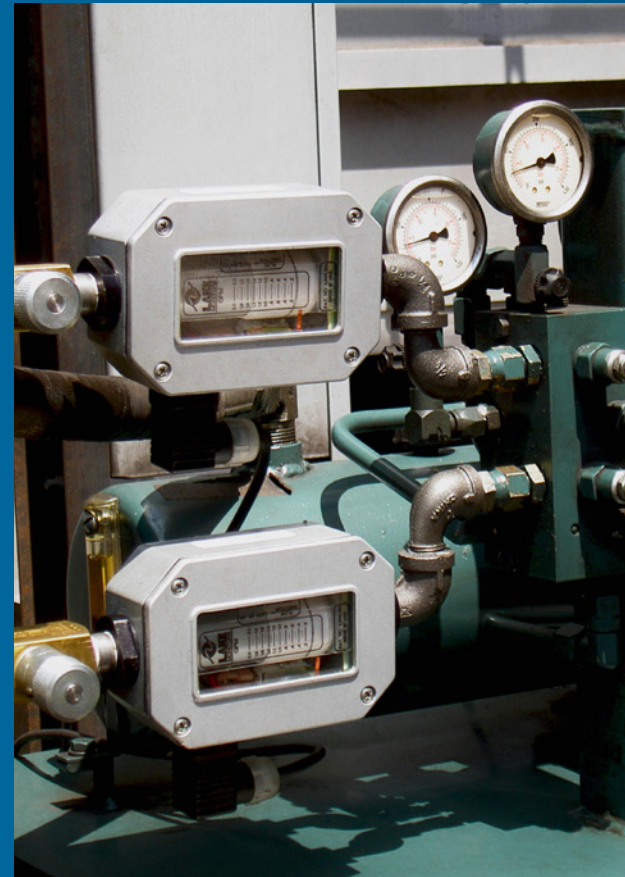

VARIABLE AREA FLOW METERS



BASIC VARIABLE AREA FLOW METER

Basic Variable Area Flow Meter is ideal for monitoring pump performance as well as measuring fluids in hydraulic circuits and cooling systems.

Measuring Accuracy: $\pm 2.0\%$ of full scale over 10:1 turndown

Repeatability: $\pm 1\%$ of full scale

Flow Ranges: 0.1-150 GPM (0.5-550 LPM)

Pressure Rating: Aluminum & brass: 3500 PSIG (240 Bar)

Stainless steel: 6000 PSIG (410 Bar)

Temperature Rating: 240°F (116°C)



BI-DIRECTIONAL FLOW METER

Bi-Directional Flow Meter is ideal for monitoring pump performance as well as measuring fluids in hydraulic circuits and cooling systems where flow is measured in both directions.

Measuring Accuracy: $\pm 4.0\%$ of full scale over 10:1 turndown

Repeatability: $\pm 1\%$ of full scale

Flow Ranges: 0.5-100 GPM (2-350 LPM)

Pressure Rating: Aluminum & brass: 3500 PSIG (240 Bar)

Stainless steel: 6000 PSIG (410 Bar)

Temperature Rating: 240°F (116°C)



CASE DRAIN FLOW METER

Case Drain Flow Meter is a low cost alternative for monitoring pump performance and identifying required maintenance.

Measuring Accuracy: $\pm 5.0\%$ of full scale over 10:1 turndown
Repeatability: $\pm 1\%$ of full scale
Flow Range: 0.1-30 GPM (0.5-115 LPM)
Pressure Rating: 1000 PSIG (69 Bar)
Temperature Rating: 240°F (116°C)



CLEARVIEW FLOW METER

ClearView Flow Meter is an economical way to monitor water flows, observe case drain flows and verify pump outputs.

Measuring Accuracy: $\pm 2.0\%$ of full scale over 10:1 turndown
Repeatability: $\pm 1\%$ of full scale
Flow Range: 0.1-30 GPM (5-110 LPM)
Pressure Rating: 325 PSIG (22.4 Bar)
Temperature Rating: ClearView H₂O: 200°F (93°C) (water only)
ClearView+: 250°F (121°C)



FLOW RATE ALARM

Flow Rate Alarm ensures sufficient flows of coolants and lubricants in mobile hydraulic equipment and industrial process control. Field adjustable alarm setting available in single or dual switch.

Measuring Accuracy: $\pm 2.0\%$ of full scale over 10:1 turndown
Repeatability: $\pm 1\%$ of full scale
Flow Range: 0.1-150 GPM (0.5-550 LPM)
2.0-1300 SCFM (1-600 SLPS)
Pressure Ratings:
Liquids - Aluminum & brass monitors: 3500 PSIG (240 Bar)
Stainless steel: 6000 PSIG (410 Bar)
Air/Gas - Aluminum & brass: 600 PSIG (40 Bar)
Stainless steel: 1000 PSIG (69 Bar)
Temperature Rating: 185°F (85°C)



FLOW RATE TRANSMITTER

Flow Rate Transmitter is ideal for batching, industrial process control, mobile hydraulic equipment and computer / PLC controlled hydraulic system monitoring application. Available in analog or pulse outputs.

Measuring Accuracy: $\pm 2.0\%$ of full scale over 10:1 turndown
Repeatability: $\pm 1\%$ of full scale
Flow Ranges: 0.1-150 GPM (0.5-550 LPM)
2-1300 SCFM (1-600 SLPS)
Pressure Ratings:
Liquids - Aluminum & brass: 3500 PSIG (240 Bar)
Stainless steel: 6000 PSIG (410 Bar)
Air/Gas - Aluminum & brass: 600 PSIG (40 Bar)
Stainless steel: 1000 PSIG (69 Bar)
Temperature Rating: 185°F (85°C)



PHOSPHATE ESTER FLOW METER

Phosphate Ester Flow Meter is compatible with aviation lubricants such as Skydrol®, and fire-retardant fluids such as Pydraul®, Fyrquil® and Houghton 900 series. Meters are density corrected to 1.145 sg.

Measuring Accuracy: ±2% of full scale over 10:1 turndown

Repeatability: ±1% of full scale

Flow Range: 0.1-130 GPM (0.5-500 LPM)

Pressure Ratings: Aluminum & brass: 3500 PSIG (240 Bar)
Stainless steel: 6000 PSIG (410 Bar)

Temperature Rating: 240°F (116°C)



HIGH TEMPERATURE FLOW METER

High Temperature Flow Meter enables flow monitoring of barrel heating fluids, thermal transfer fluids such as Syltherm® coolant flows, hydraulic circuits and sub-circuits.

Measuring Accuracy: ±2% of full scale over 10:1 turndown

Repeatability: ±1% of full scale

Flow Range: 0.1-150 GPM (0.4-560 LPM)

Pressure Rating:

Liquids - Aluminum & brass meters: 3500 PSIG (240 Bar)

Stainless steel meters: 6000 PSIG (410 Bar)

Air/Gas - Aluminum and brass meters: 600 PSIG (40 Bar)

Stainless steel meters: 1000 PSIG (69 Bar)

Temperature Rating: H-Series 400°F (204°C),

J-Series 600°F (315°C)



PNEUMATIC FLOW METER

Pneumatic Flow Meters are ideal for monitoring air compressor efficiencies, pneumatic tool air consumption and industrial gas flows.

Measuring Accuracy: ±2.5% of full scale in the center third of the measuring range; ±4% in upper and lower thirds

Flow Range: 2.0-1300 SCFM @ 100 PSIG (1-600 SLPS)

Pressure Ratings: Aluminum & brass: 600 PSIG (40 Bar)

Stainless steel: 1000 PSIG (69 Bar)

Temperature Rating: 240°F (116°C)



HYDRAULIC TEST ANALYZER FLOW METER

Hydraulic Test Analyzer is used to diagnose faults in hydraulic circuits, determine horsepower and test for component wear and cylinder leakages. Two options are available: T Series (flow and pressure) and T Series (flow, pressure and temperature).

Measuring Accuracy: Flow: ±2% of full scale over 10:1 turndown

Pressure: ±2.5% of full scale

Temperature: ±2.5% of full scale

Repeatability: ±1% of full scale – all measurements

Flow Measuring Range: Flow: 0.1–150 GPM (0.5-550 LPM)

Temperature: 0°F to 250°F (-20°C to 120°C)

Pressure Ratings: Aluminum: 3000 PSIG (200 Bar)

Stainless steel: 5000 PSIG (340 Bar)

Temperature Rating: 240°F (116°C)



WTA — HYDRAULIC ANALYZER

WTA Series Hydraulic Analyzer is a simple, compact design that allows for simultaneous measurement of flow, pressure and temperature on mobile industrial and agricultural equipment.

- Measuring Accuracy:** Flow: $\pm 4\%$ of full scale
Pressure: $\pm 1.6\%$ of full scale
Temperature: $\pm 5^\circ\text{F}$ ($\pm 2.5^\circ\text{C}$)
- Flow Ranges:** 2-32 GPM (10-120 lpm)
2-54 GPM (10-200 lpm)
- Pressure Rating:** 6000 PSIG (420 Bar)
- Ambient Temperature Rating:** 14 to 122°F (-10 to 50°C)
- Fluid Temperatures:** 68°F to 176°F (20°C to 80°C) continuous use. Intermittently (< 10 minutes) up to 230°F (110°C).



FLOWSTAT — PADDLE WHEEL FLOW METER

Lake FlowStat Paddle Wheel Flow Meter is a perfect monitoring solution for chillers/cooling circuits, HVAC, medical equipment, batching and industrial process control applications.

- Measuring Accuracy:** $\pm 2\%$ of full scale over 10:1 turndown
- Repeatability:** $\pm 0.5\%$ of full scale
- Flow Ranges:** 0.5–15 GPM (2-60 LPM)
0.25-4.5 GPM (1-17 LPM)
1.5–50 GPM (60-200 LPM)
- Pressure Rating:** Stainless steel cover: 500 PSIG (34 Bar)
Clear polycarbonate cover: 200 PSIG (14 Bar)
- Temperature Rating:** 20°F to 225°F (-6°C to 107°C)
- Body Material:** Stainless steel



FLOWSTAT ES — PADDLE WHEEL FLOW METER

FlowStat ES is an economical monitoring solution for chillers/cooling circuits, HVAC, batching and industrial process control applications.

- Measuring Accuracy:** $\pm 2\%$ over a 10:1 turndown
- Repeatability:** $\pm 0.5\%$ of full scale
- Flow Range:** 0.5 to 15 GPM (2-60 LPM)
Optional low-flow adapter 0.25-4.5 GPM
- Pressure Rating:** up to 150 PSIG (10 Bar)
- Temperature Rating:** 20°F to 150°F (-6°C to 65°C)
- Body Material:** Plastic



MX-9000 — PANEL METER

MX 9000 Panel Meter is ideal for any industrial flow measurement application where a simple, compact & easy-to-use remote panel meter is required.

- Flow Display Options:** Rate, total, limit, batch and ratio
- Channels:** Single or dual channel
- Batch Controller:** Stores up to 20 batch recipes
- Output Options:** Programmable Form C relay and 4-20 mA
- Data Logging Available**

AW-Lake Company
2440 W. Corporate Preserve Dr. #600
Oak Creek, WI 53134
414.574.4300
www.aw-lake.com

KEM Küppers Elektromechanik
GmbH Liebigstraße 5
85757 Karlsfeld, Germany
+49 (0)8131 59391-0
www.kem-kueppers.com

TASI Flow China
Rm. 2429 Jin Yuan
Office Building, No. 36
CN - BeiYuan Road, Beijing 100012
+86 10 520 037 38

